

5	修订号	修订说明	6	7	8
			日期	签名	检查

Font :GB2312

Font height: 5MM Font spacing :0.5MM


Mark form :F1960 CF8 X X X 150PSI KX

Standard / Material / size / Pressure / Manufacturer

Certification:  NSF/ANSI/CAN61:Q≤0.5

Unit: MM

size	L±0.3	A±0.3	B±0.1	C±0.1	H±0.1	
1P×¾P×1P	91	28	22.1	28	48.5	KXCP-030
1P×½P×1P	85	28	15.6	28	48.5	KXCP-028
1P×¾P×¾P	82	28	22.1	22.1	40.2	KXCP-029
1P×1P×¾P	88	28	28	22.1	40.2	KXCP-032
1P×1P×½P	88	28	28	15.6	36.2	KXCP-031
1P×½P×¾P	76	28	15.6	22.1	40.2	KXCP-034
1P×¾P×½P	82	28	22.1	15.6	36.2	KXCP-035
¾P×½P×¾P	70	22.1	15.6	22.1	38	KXCP-025
¾P×½P×½P	70	22.1	15.6	15.6	32	KXCP-024
¾P×¾P×½P	76	22.1	22.1	15.6	32	KXCP-026
¾P×¾P×1P	85	22.1	22.1	28	48.5	KXCP-033
¾P×¾P×3/8P	66.7	22.1	22.1	12.1	29	KXCP-027
½P×½P×3/8P	54.6	15.6	15.6	12.1	25.8	KXCP-023
1P×1P×1P	97	28	28	28	48.5	KXCP-022
¾P×¾P×¾P	76	22.1	22.1	22.1	38	KXCP-021
½P×½P×½P	57.6	15.6	15.6	15.6	28.8	KXCP-020

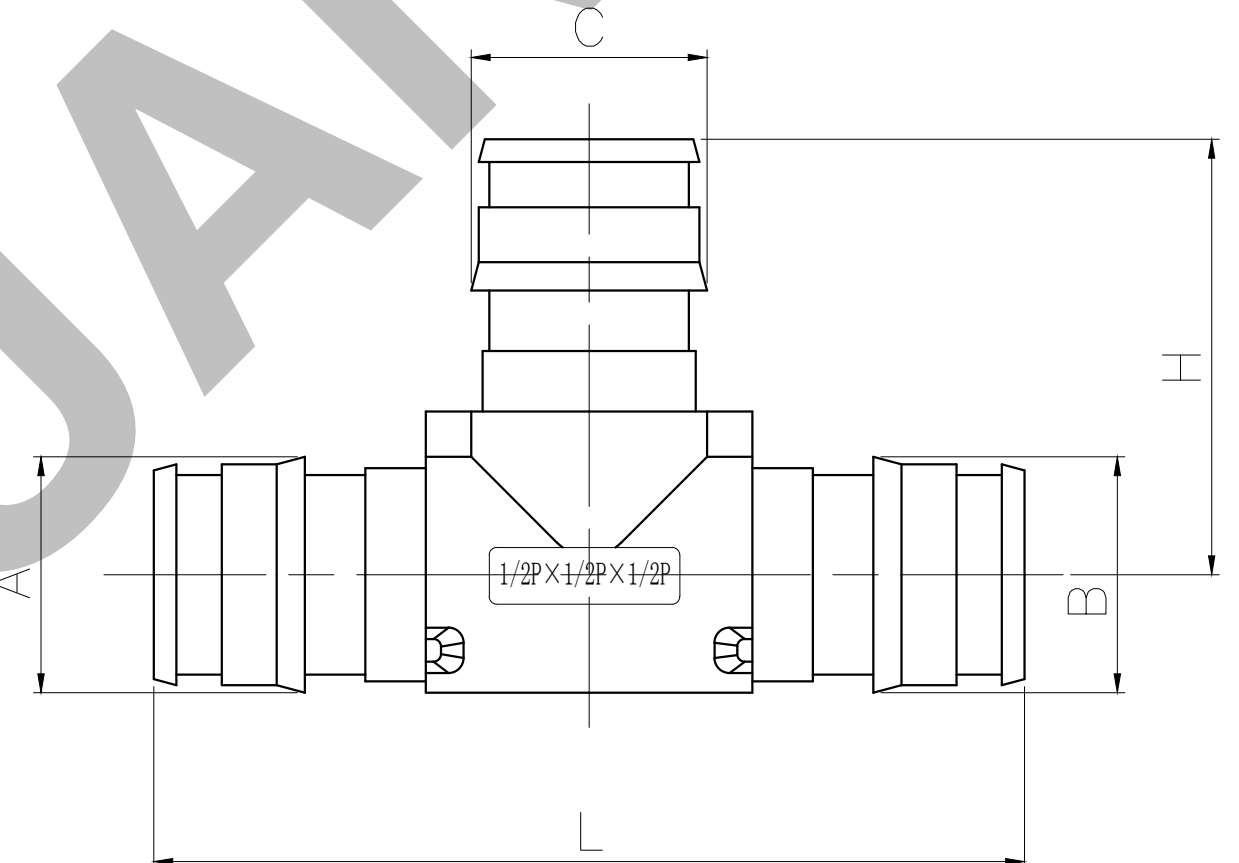

PEX tee F1960 cold expansion			Proportion	
			Material	
Design			Texture	
Drawing	李占良	2024.06.02	Anping County Kaixuan Stainless steel co.,Ltd	
Review				